

FA-70

TIME & ATTENDANCE ACCESS CONTROL SYSTEM







RFID





LAN



USB



Finger

WiFi

Access Control

Fingerprint Time Attendance and Access Control

STORAGE CAPACITY

Finger Capacity	3000
Card Capacity	3000
Max User	3000
Password	3000
Log Capacity	100000

FEATURES

High-Speed and Accurate Fingerprint Identification
Fingerprint, Card, Password authentication
Output relay for door open.
Supremely low Electric energy consumption.
Highly reliable and durable.
Comprehensive software development kit(SDK) is available for development and integration.

FA-70 TIME & ATTENDANCE ACCESS CONTROL SYSTEM

COMMUNICATION INTERFACE

Communication	TCP/IP, Wi-Fi, Rs485, USB
---------------	---------------------------

BIOMETRIC

The state of the s	
Push Data	Yes
Sensor type	500 DPI
FAR	0.00001%
FRR	0.001%
OS	Linux
Verification Time	<=1 second
RF card options	Proximity / Mifare (Optional)

AUDIO / VISUAL

Display	2.8" TFT LCD color screen
Voice instruction	16-bit Hi-Fi voice & sound indication
Language	English
Keypad	Feather Touch Keypad

PROFESSIONAL ACCESS CONTROL

Wiegand	Input / Output
Relay	Yes
Standard Functions	Anti-passback, Auto Status,
	Record Query, T9 Input, 14 Digit User ID
Support	FA-FR12, FA-KR20E, Remote
	Push Button, No Touch

POWER & ENVIRONMENT

Operating Temperature	0°c ~ 50°c
Power	12V DC / 2A
Dimension (L*H*W)	75 x 200 x 35 mm



High-Speed and Accurate Fingerprint Identification



WiFi, RS485, TCP/IP, USB



Unaffected by High Temperatures 0° ~ 50°

Software

Desktop, Web, Cloud



Time Attendance



Access Control



Employee Self Service




Mobile App



Disclaimer: Product specifications are given here is for information purpose only and it may change at any time WITHOUT prior notice. We request our customers that before purchase, confirm with us about available features.

FA - 70 CONNECTION DIAGRAM

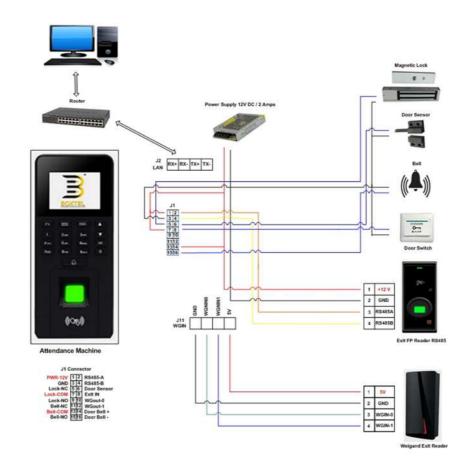

BOXTEL SYSTEMS INTERNATIONAL PVT LTD

Sales: sales@boxtelsystems.com

Support: support@boxtelsystems.com

Website: https://www.boxtelsystems.com